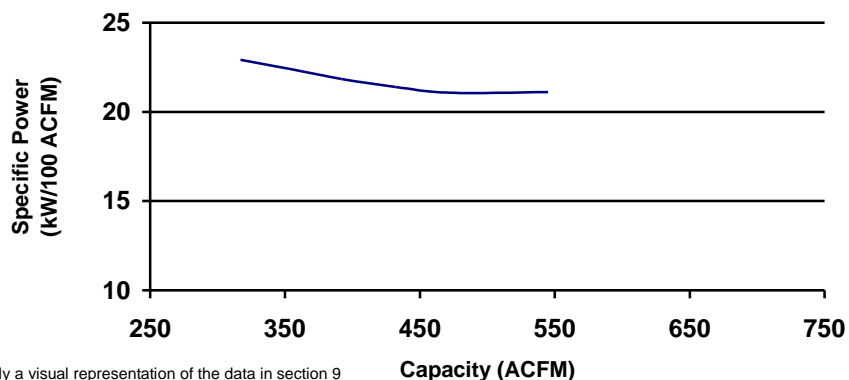


COMPRESSOR DATA SHEET

Rotary Screw Variable Frequency Drive Compressor

MODEL DATA - FOR COMPRESSED AIR			
1	Manufacturer: Ingersoll Rand	Date: December 18, 2009	
2	Model Number: R90N - W <input type="checkbox"/> Air-cooled <input checked="" type="checkbox"/> W Water-cooled <input checked="" type="checkbox"/> X Oil-injected <input type="checkbox"/> Oil-free	# of Stages: 1	VALUE UNIT
3	Full Load Operating Pressure ^b	135	psig ^b
4	Maximum Full Flow Operating Pressure ^c	145	psig ^c
5	Drive Motor Nameplate Rating	125	hp
6	Drive Motor Nameplate Nominal Efficiency	95.4	percent
7	Fan Motor Nameplate Rating (if applicable)	0.8	kW
8	Fan Motor Nameplate Nominal Efficiency	86.6	percent
9	Input Power (kW)	Capacity (acfm) ^{a,c}	Specific Power (kW/100 acfm) ^e
	114.5	545.0	21.01
	99.5	472.4	21.06
	92.5	432.1	21.41
	85.6	391.9	21.84
	79.1	353.1	22.40
	72.7	317.0	22.93
10	Total Package Input Power at Zero Flow ^d	0.0	kW ^d
11	 <p style="font-size: small;">Note: Graph is only a visual representation of the data in section 9</p>		

NOTES:

- a. Measured at the discharge terminal point of the compressor package in accordance with the Annex E to ISO 1217. acfm is actual cubic feet per minute at inlet conditions.
- b. The operating pressure at which the Capacity and Electrical Consumption were measured for this data sheet.
- c. Maximum pressure attainable at full flow, usually the unload pressure setting for load/no load control or the maximum pressure attainable before capacity control begins. May require additional power.
- d. No Load Power. Total package input power at other than reported operating points will vary with control strategy.
- e. Tolerance is specified in the Annex E to ISO 1217 as follows:

Volume Flow Rate at specified conditions		Volume Flow Rate ^f	Specific Energy Consumption ^g
m^3/min	ft^3/min	%	%
Below 0.5	Below 15	+/- 7	+/- 8
0.5 to 1.5	15 to 50	+/- 6	+/- 7
1.5 to 15	50 to 500	+/- 5	+/- 6
Above 15	Above 500	+/- 4	+/- 5

Member

